


SMART FILM

Polymer Dispersed LiquidCrystal Smart films iscommentedthemostadvanced curtain todayand future,designed newor retrofit anexistingspaceforaninstant upgrade, instantly switchingfrom opaque to transparentfordynamiclightcontrol with a HD real projection function ,widely used in interior andarchitecturaldesign,commercial center ,rail transportation, and even avant-gardeindustrialproducts.

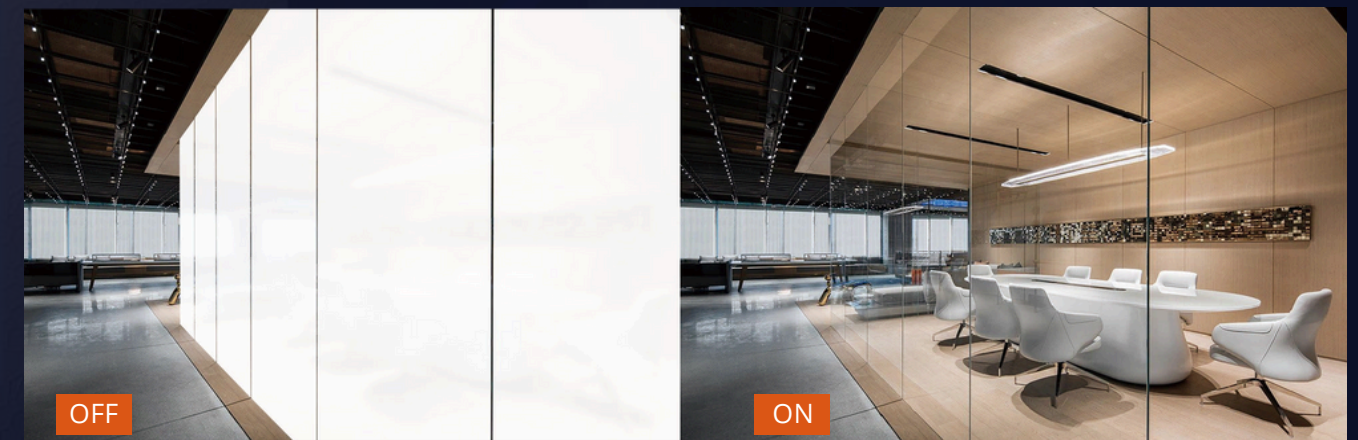


About Smart Film

Smart film is a new type of electronic light control product. The electronically controlled smart film is a liquid crystal/polymer hybrid material injected in the middle of two transparent conductive films.

PDLC film in the absence of an electric field, the electronically controlled smart film is in an opaque state.


When an alternating current is applied, the liquid crystal molecules are arranged in an orderly manner, at which point the electronically controlled dimming film changes from an opaque state (OFF) to a transparent state (ON).

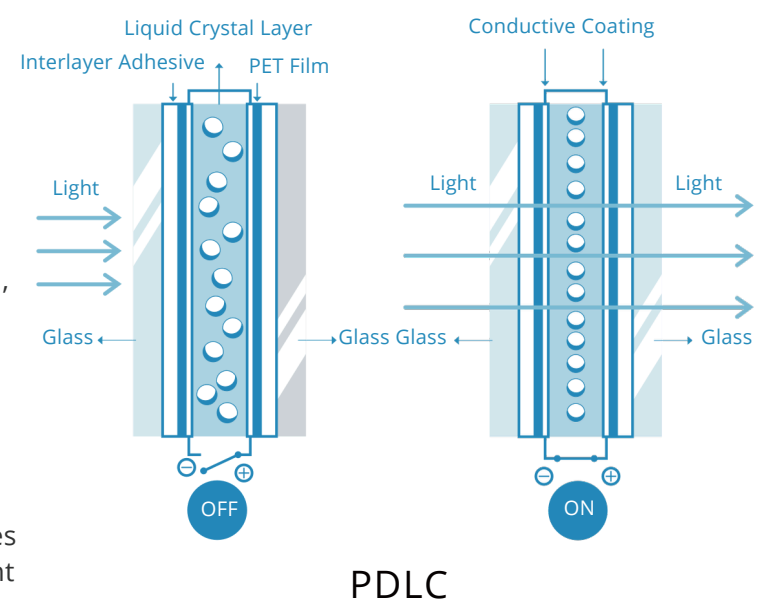

PNLC film different from normal PDLC smart film, the working principle of PNLC film is opaque-power on, clear power off.


The electric field enables a rapid transition from the ON state to the OFF state and from the OFF state to the ON state.

Smart film is usually applied to the surface of the glass or laminated between the glass layers, making the otherwise transparent glass, more possible.

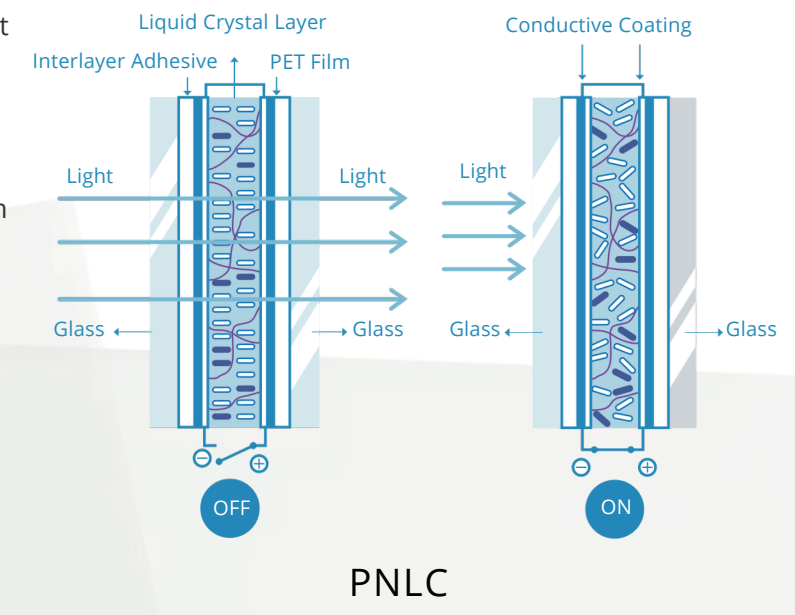


Two types Smart Film

There are two types of Smart films, Self-adhesive Smart film and Laminated Smart film.

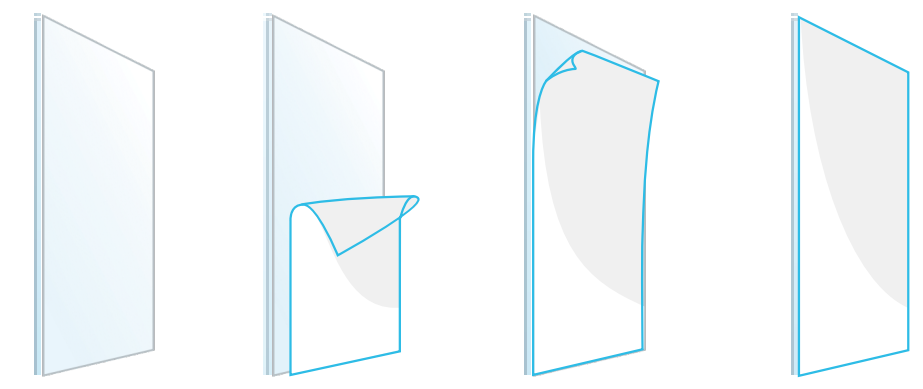


Self-adhesive Smart film

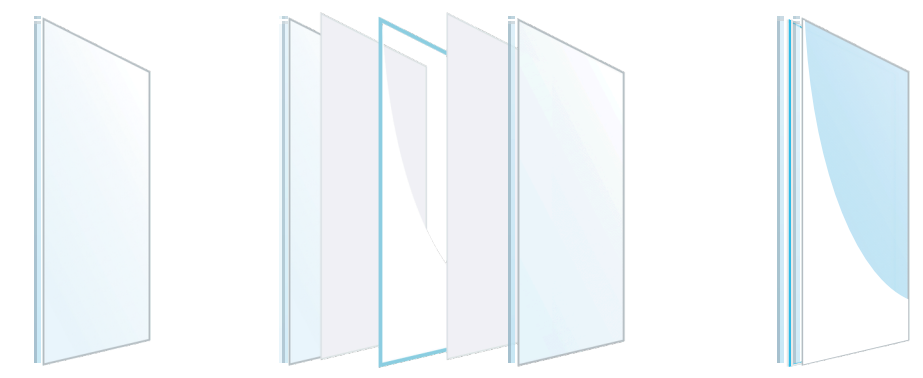

Laminated Smart film


Characteristics

SmartFilm

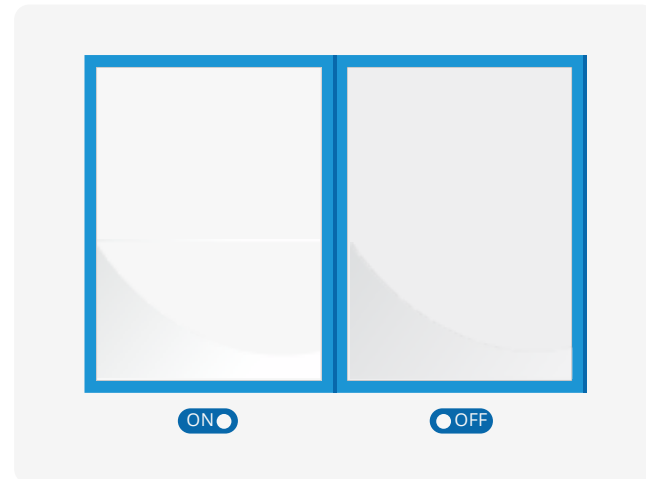


Privacy protection

To protect your privacy and security, you can control it to be transparent or opaque at any time. Make your space more malleable, choose open or private at will.

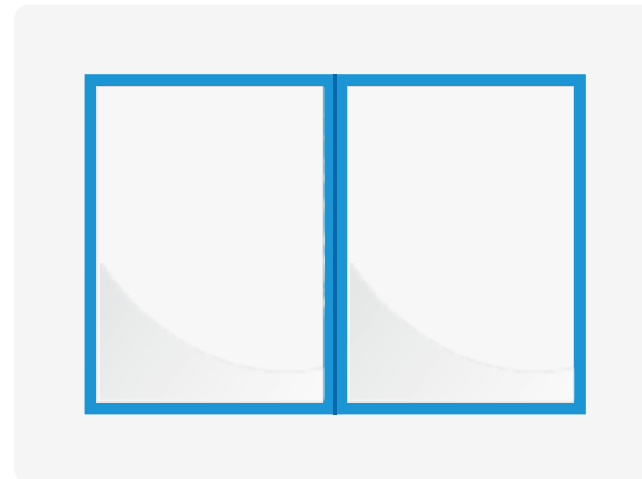


Security

Even if the glass is broken, the fragments can still be adsorbed on the PDLC film, which can avoid personal injury caused by broken glass.

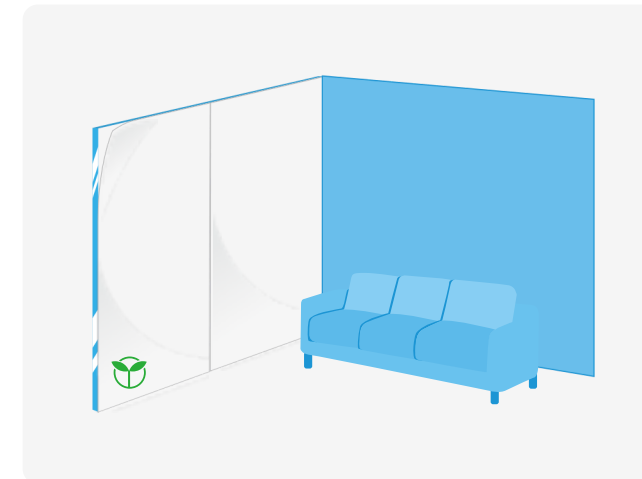


Environmental protection

The installation of PDLC film can effectively reduce the loss of decoration, which can better reduce pollution and protect the environment.

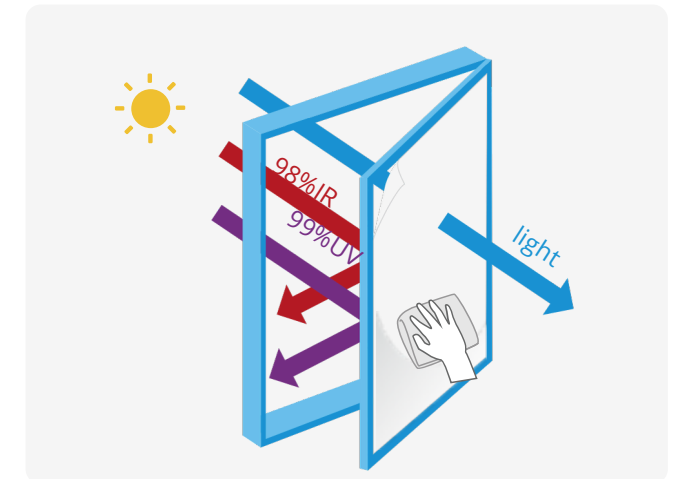

Heat-resistant and anti-scratch

The maximum operating temperature is 105°C, which allows the product to continue to operate at higher temperatures. The anti-scratch layer protects the surface of the product from daily scratches and does not affect the clarity of the product itself.

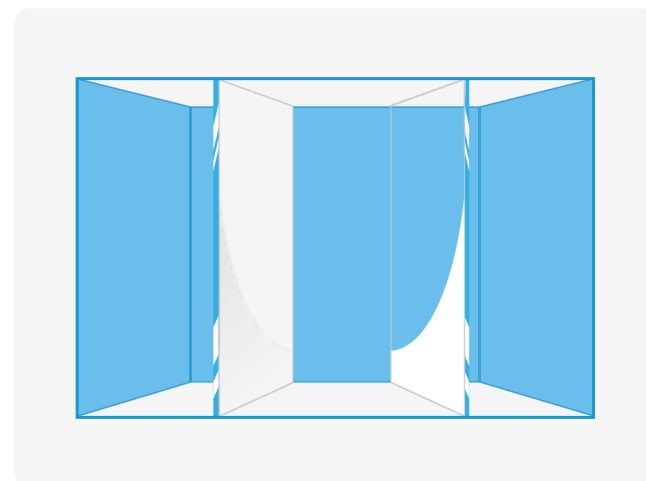

Space partition

With the use of PDLC film, glass partitions can easily differentiate between different spaces, making your three-dimensional space more malleable and versatile.




Anti-noise

Compared with ordinary glass, the anti-noise ability of glass using Filmbase PDLC film is increased by 20%.



Touch screen and projection

Using a high-definition projector, it is easy to realize the viewing scene, with a viewing angle of 180°, 4K picture quality display effect, and with the radar can be multi-touch, video interaction.

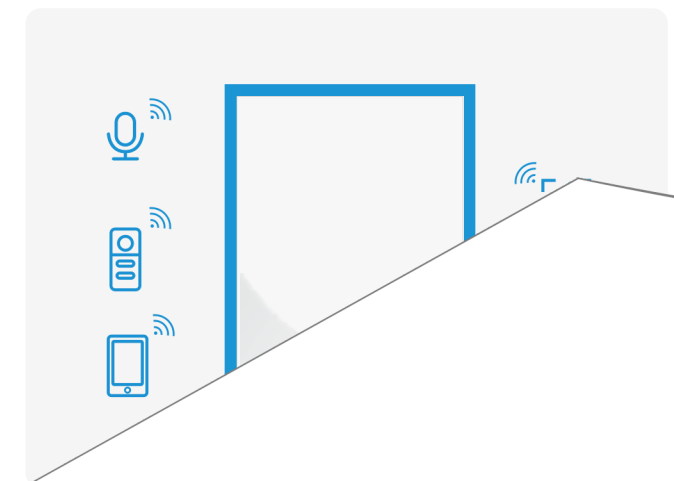

Various control methods


In order to meet your various needs, you can choose your preferred control method: remote control, wired control, infrared induction, voice control, mobile application, etc. In addition, an FM transformer can be selected to gradually change the film.



FILMBASE 091

FILMBASE091 is the luxury PDLC film in the today market with 90%-92% transmittance, < 3% haze, which maximizes the clarity of the original glass and enhances privacy.

It is used in scientific research institutions, intelligence agencies, luxury villas, president's office, super 5-star hotels, Hollywood theaters, and other places that require ultra-transparency and absolute privacy.

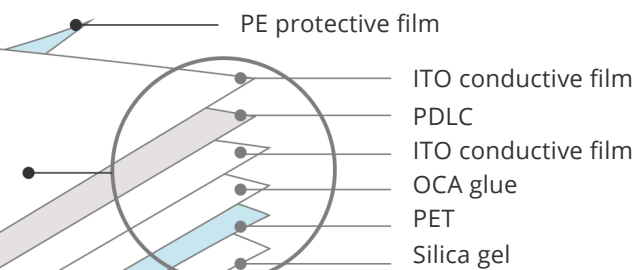

PET release film

Note: Color and thickness do not represent the actual situation, only for the convenience of illustration.

Size

FILMBASE 091

Items			
Adhesive PDLC film	Total Thickness	0.47mm	
	Cut to Sheet	Width	100-1800(mm)
		Length	100-50000(mm)
	Roll	Width	1200,1500,1800(mm)
		Length	30meters /50meters
	Roll tube	Inner Diameter	6 inches
Laminated PDLC film	Total Thickness	0.38mm	
	Cut to Sheet	Width	100-1800(mm)
		Length	100-50000(mm)
	Roll	Width	1200,1500,1800(mm)
		Length	30meters /50meters
	Roll tube	Inner Diameter	6 inches

Optical Parameter

FILMBASE 091


Items	ON/OFF		Test Methods/Standards
Operating voltage	ON	60V	Multimeter/ Voltage Regulator,WGW
Power consumption	ON	≤ 5W/m ²	Multi-parameter electric measuring instrument
Viewing angle	ON	≥ 160°	Visual Inspection
Uv blocking rate	OFF	≥ 99%	Optical transmittance tester
Infrared blocking rate	OFF	≥ 60%	
Response time	OFF→O	≤ 30 ms	Liquid crystal parameter integrated tester
	N	≤ 200 ms	
Operating temperature	ON→OF	-30°C ~ 50°C	constant temperature and humidity testing machine
Life-span	F	100000 Hours	GB18910.5-2008
Switching times	--	≥2 million times	Self-made on/off tester

PDLC film is driven by AC power, colorless and transparent when power is added, and fogged and translucent when power is removed, and its photoelectric performance is shown in the table above.

Product Transparency / Haze

FILMBASE 091


Items	ON/OFF	Full light tester			Parallel light tester	
		Haze	Full light transmittance	b value	45° light	Parallel light
Adhesive PDLC film	OFF	94.5	85.0	7.57	/	/
	ON	3.00	91.0	5.29	60.0	88.0
Laminated PDLC film	OFF	94.5	85.0	6.79	/	/
	ON	3.00	91.0	4.31	60.0	88.0

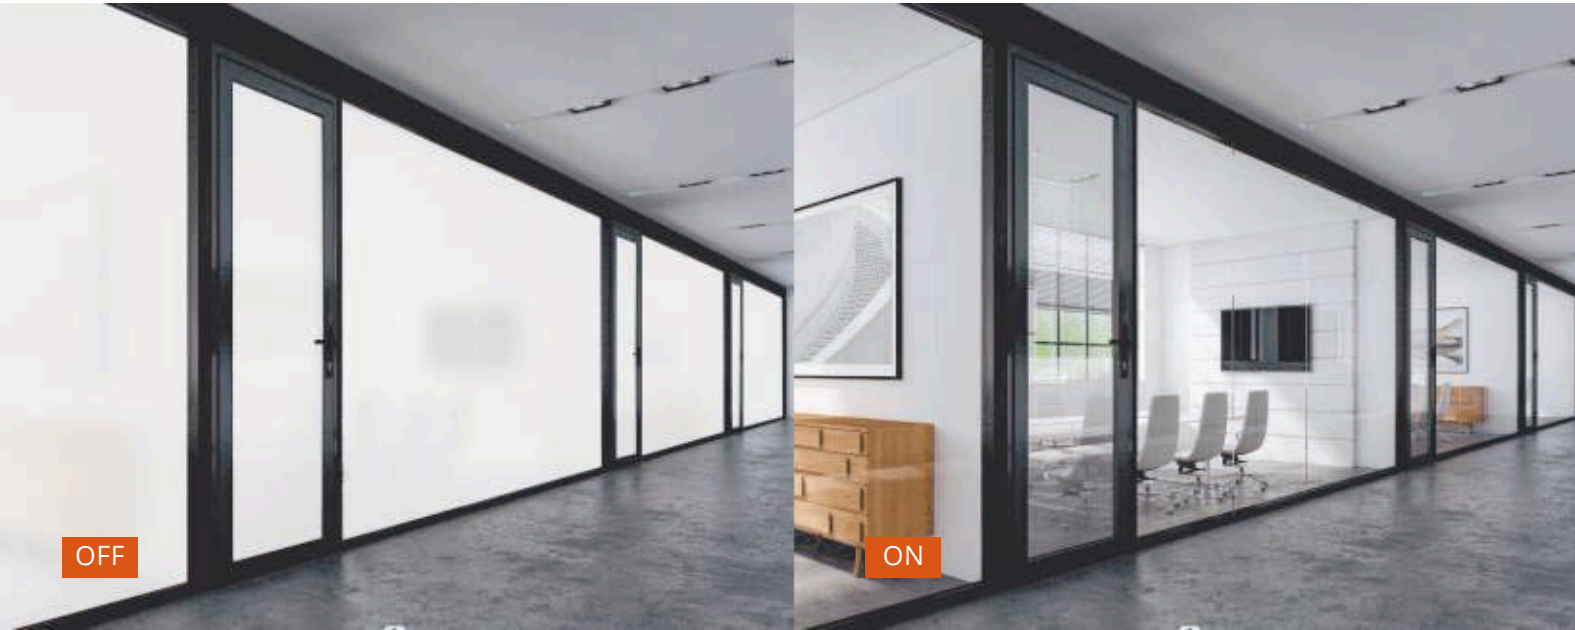

FILMBASE 087

087 is Filmbase most hot sales item ,Super clear 87-89% Transmittance and nice 3-4% haze .

It is suitable for modern office partitions, space partitions, conference halls, museums, exhibition centers, star hotels, bars, shops, hospitals and other places that need to integrate the functions of transparency, privacy, partition and projection display.

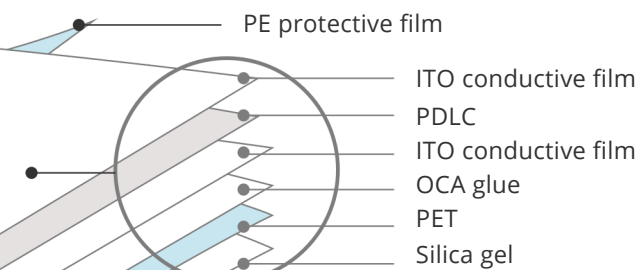

PET release film

Note: Color and thickness do not represent the actual situation, only for the convenience of illustration.

Size

FILMBASE 087

Items			
Adhesive PDLC film	Total Thickness		0.47mm 100-1800(mm)
	Cut to Sheet	Width	100-50000(mm)
		Length	1000,1200,1500,1800(mm)
	Roll	Width	30meters /50meters
		Length	6 inches
	Roll tube	Inner Diameter	0.38mm
Laminated PDLC film	Total Thickness		100-2100(mm)
	Cut to Sheet	Width	100-50000(mm)
		Length	1000,1200,1400,1500,1800,2000,2100(mm)
	Roll	Width	30meters /50meters
		Length	6 inches
	Roll tube	Inner Diameter	

Optical Parameter

FILMBASE 087

Items	ON/OFF		Test Methods/Standards
Operating voltage	ON	60V	Multimeter/ Voltage Regulator,WGW
Power consumption	ON	≤ 5W/m ²	Multi-parameter electric measuring instrument
Viewing angle	ON	≥ 160°	Visual Inspection
Uv blocking rate	OFF	≥ 99%	Optical transmittance tester
Infrared blocking rate	OFF	≥ 60%	
Response time	OFF→O	≤ 30 ms	Liquid crystal parameter integrated tester
	N	≤ 200 ms	
Operating temperature	ON→OF	-30°C ~ 50°C	constant temperature and humidity testing machine
Life-span	F	100000 Hours	GB18910.5-2008
Switching times	--	≥2 million times	Self-made on/off tester

PDLC film is driven by AC power, colorless and transparent when power is added, and fogged and translucent when power is removed, and its photoelectric performance is shown in the table above.

Product Transparency / Haze

FILMBASE 087


Items	ON/OFF	Full light tester			Parallel light tester	
		Haze	Full light transmittance	b value	45° light	Parallel light
Adhesive PDLC film	OFF	94.5	78.0	6.95	/	/
	ON	4.53	88.0	4.71	58.0	86.0
Laminated PDLC film	OFF	94.5	78.0	5.9	/	/
	ON	4.53	88.0	3.72	58.0	86.0



FILMBASE 085

085 is Filmbase most cost effective item, Nice clear 84-86% Transmittance and nice 4-5% haze, which is very welcome by the projects which does not request super high transparency and low haze applications.

It is suitable for modern office partitions, space partitions, conference halls, museums, exhibition centers, star hotels, bars, shops, hospitals and other places that need to integrate the functions of transparency, privacy, partition and projection display.

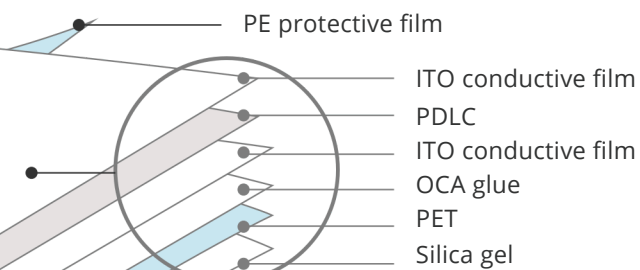

PET release film

Note: Color and thickness do not represent the actual situation, only for the convenience of illustration.

Size

FILMBASE 085

Items			
Adhesive PDLC film	Total Thickness		0.47mm 100-1800(mm)
	Cut to Sheet	Width	100-50000(mm)
		Length	1000,1200,1500,1800(mm)
	Roll	Width	30meters /50meters
		Length	6 inches
	Roll tube	Inner Diameter	0.38mm
Laminated PDLC film	Total Thickness		100-2100(mm)
	Cut to Sheet	Width	100-50000(mm)
		Length	1000,1200,1500,1800,2000,2100(mm)
	Roll	Width	30meters /50meters
		Length	6 inches
	Roll tube	Inner Diameter	

Optical Parameter

FILMBASE 085

Items	ON/OFF		Test Methods/Standards
Operating voltage	ON	60V	Multimeter/ Voltage Regulator,WGW
Power consumption	ON	≤ 5W/m ²	Multi-parameter electric measuring instrument
Viewing angle	ON	≥ 160°	Visual Inspection
Uv blocking rate	OFF	≥ 99%	Optical transmittance tester
Infrared blocking rate	OFF	≥ 60%	
Response time	OFF→O	≤ 30 ms	Liquid crystal parameter integrated tester
	N	≤ 200 ms	
Operating temperature	ON→OF	-30°C ~ 50°C	constant temperature and humidity testing machine
Life-span	F	100000 Hours	GB18910.5-2008
Switching times	--	≥2 million times	Self-made on/off tester

PDLC film is driven by AC power, colorless and transparent when power is added, and fogged and translucent when power is removed, and its photoelectric performance is shown in the table above.

Product Transparency / Haze


FILMBASE 085

Items	ON/OFF	Full light tester			Parallel light tester	
		Haze	Full light transmittance	b value	45° light	Parallel light
Adhesive PDLC film	OFF	94.5	78.0	6.62	/	/
	ON	4.53	84.0	4.56	58.0	82.0
Laminated PDLC film	OFF	94.5	78.0	5.64	/	/
	ON	4.53	84.0	3.55	58.0	81.0



FILMBASE Warrior

Filmbase Warrior series PDLC film is designed for high temperature application, Such as large-scale architectural curtain walls, outdoor partitions, glass balconies, outdoor swimming pool fences etc.

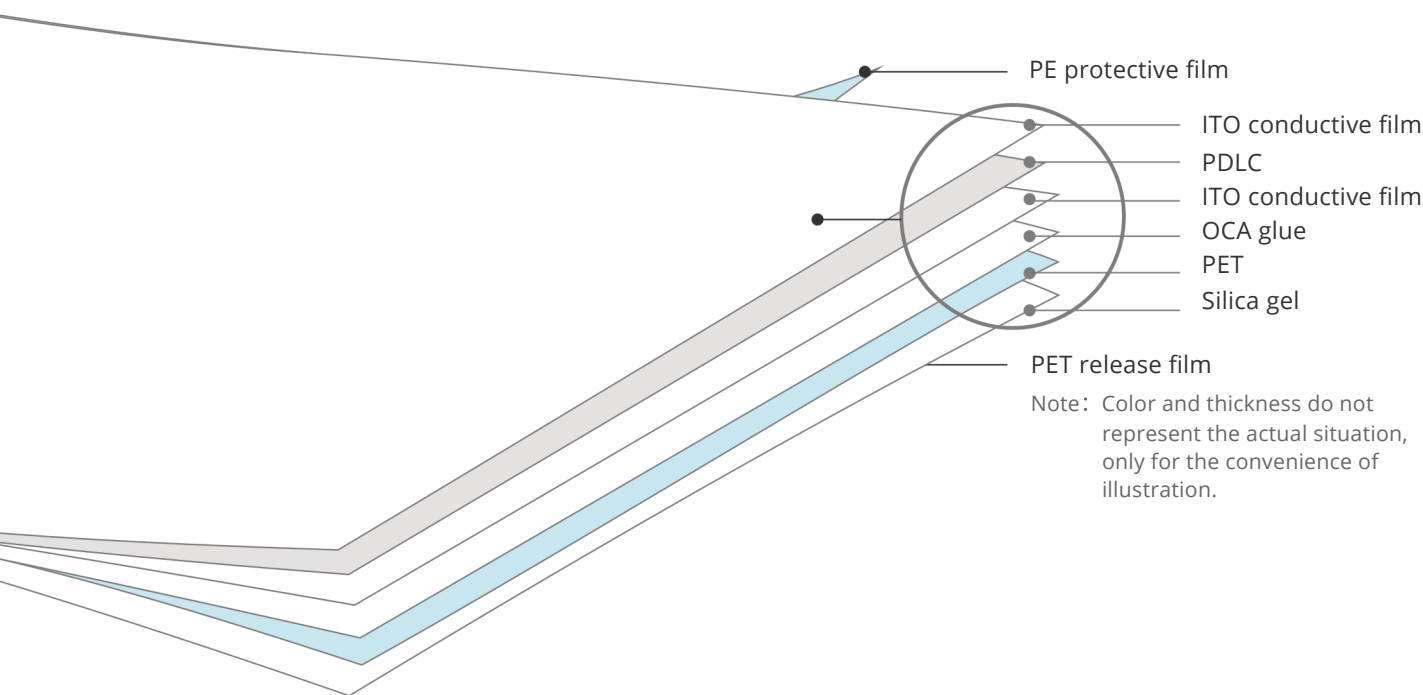

Size

FILMBASE Warrior

Items			
Adhesive PDLC film	Total Thickness		0.47mm
	Cut to Sheet	Width	100-1500(mm)
		Length	100-50000(mm)
	Roll	Width	1200,1500(mm)
		Length	30meters /50meters
	Roll tube	Inner Diameter	6 inches

Optical Parameter

FILMBASE Warrior


Items	ON/OFF		Test Methods/Standards
Operating voltage	ON	60V	Multimeter/ Voltage Regulator,WGW
Power consumption	ON	≤ 5W/m ²	Multi-parameter electric measuring instrument
Viewing angle	ON	≥ 160°	Visual Inspection
Uv blocking rate	OFF	≥ 99%	Optical transmittance tester
Infrared blocking rate	OFF	≥ 60%	
Response time	OFF→O	≤ 30 ms	Liquid crystal parameter integrated tester
	N	≤ 200 ms	
Operating temperature	ON→OF	-30°C ~ 90°C	constant temperature and humidity testing machine
Life-span	F	100000 Hours	GB18910.5-2008
Switching times	--	≥2 million times	Self-made on/off tester

PDLC film is driven by AC power, colorless and transparent when power is added, and fogged and translucent when power is removed, and its photoelectric performance is shown in the table above.

Product Transparency / Haze


FILMBASE Warrior

Items	Full light tester				Parallel light tester	
	ON/OFF	Haze	Full light transmittance	b value	45° light	Parallel light
/	OFF	94.5	78.0	5.93	/	/
	ON	4.53	83.5	3.77	58.0	81.0

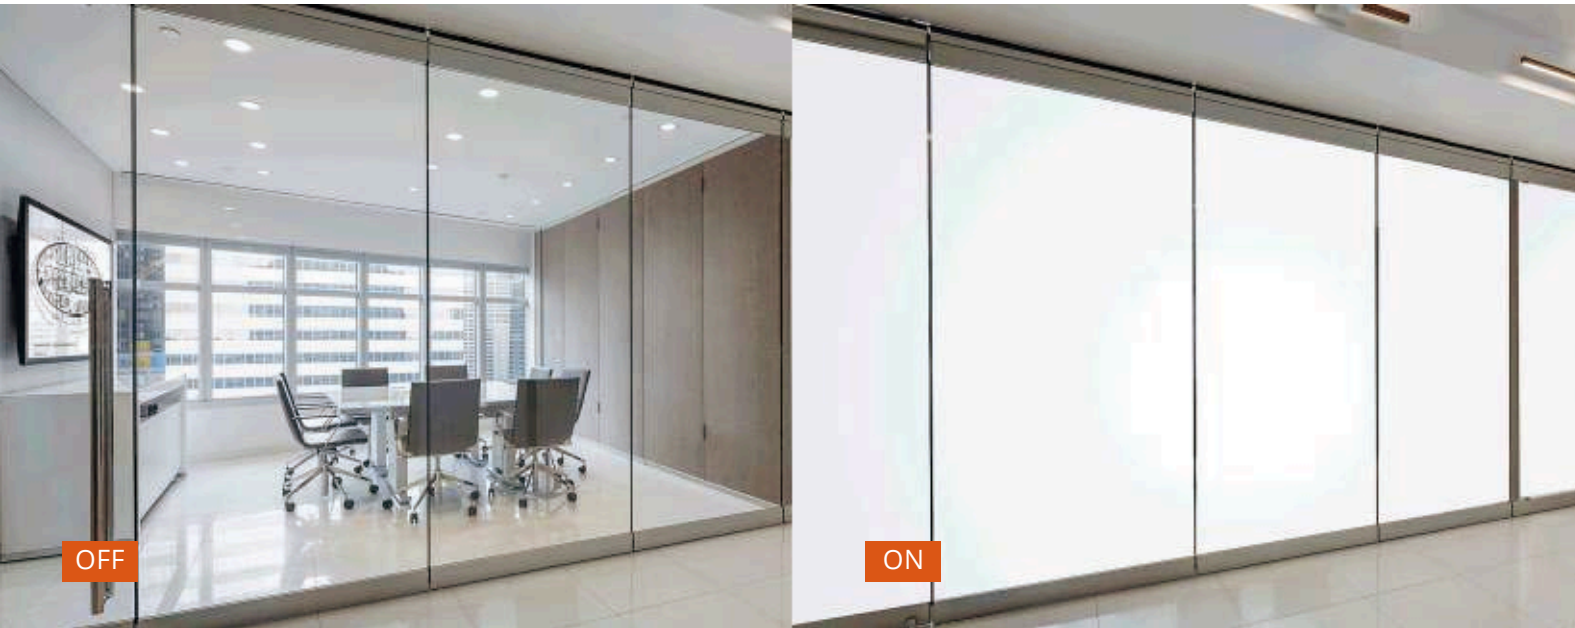

FILMBASE Reverse

Filmbase Reverse film is a special transparent liquid crystal film, can be sandwiched in the glass or adhesive on the glass, become opaque when power on, can be widely used in space partition, electronic products, automotive fields, can be sandwiched into the glass or Adhesive onto the existed glass.

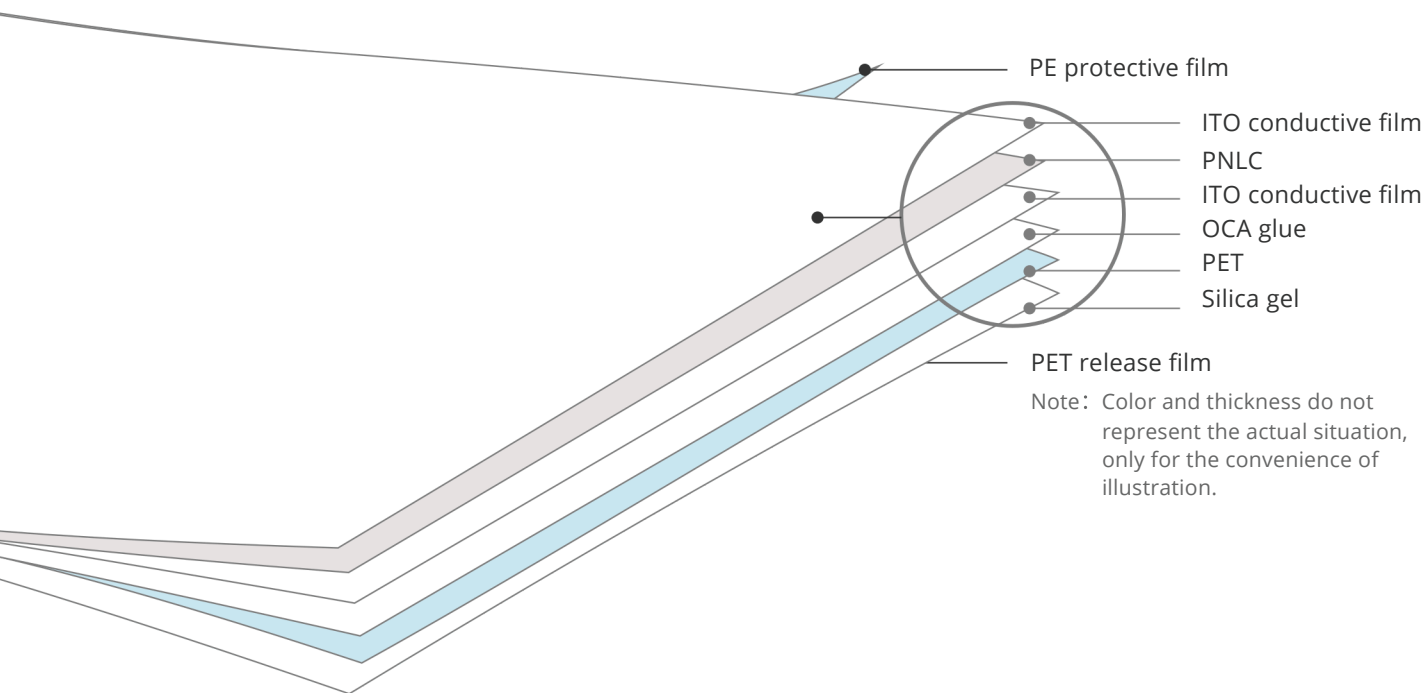

Size

FILMBASE Reverse

Items			
Adhesive PNLC film	Total Thickness	0.37mm	100-
	Cut to Sheet	Width	1400(mm)
		Length	100-50000(mm)
	Roll	Width	1200,1400(mm)
		Length	30meters /50meters
	Roll tube	Inner Diameter	6 inches
Laminated PNLC film	Total Thickness	0.28mm	
	Cut to Sheet	Width	100-1400(mm)
		Length	100-50000(mm)
	Roll	Width	1200,1400(mm)
		Length	30meters /50meters
	Roll tube	Inner Diameter	6 inches

Optical Parameter

FILMBASE Reverse


Items	ON/OFF		Test Methods/Standards
Operating voltage	ON	60V agv 4-	Multimeter/ Voltage Regulator,WGW
Power consumption	ON	6/m2 ≥ 160°	Multi-parameter electric measuring instrument
Viewing angle	OFF	+1	Visual Inspection
Uv blocking rate	ON	≥ 85%	Optical transmittance tester
Infrared blocking rate	ON	≥ 60%	
Response time	OFF→O	≤ 200 ms	Liquid crystal parameter integrated tester
	N	≤ 220 ms	
Operating temperature	ON→OF	-30°C ~ 50°C	constant temperature and humidity testing machine
Life-span	F	100000	GB18910.5-2008
Switching times	--	±10%	Self-made on/off tester

PNLC film is driven by AC power, fogged and translucent when power is added, colorless and transparent when power is removed, and its photoelectric performance is shown in the table above.

Product Transparency / Haze


FILMBASE Reverse

Items	ON/OFF	Full light tester			Parallel light tester	
		Haze	Full light transmittance	b value	45° light	Parallel light
Adhesive PNLC film	OFF	7	90.0	3.85	80.0	85.0
	ON	92	88.0	4.42	/	19.0
Laminated PNLC film	OFF	7	90.0	1.71	80.0	85.0
	ON	92	88.0	1.84	/	19.0

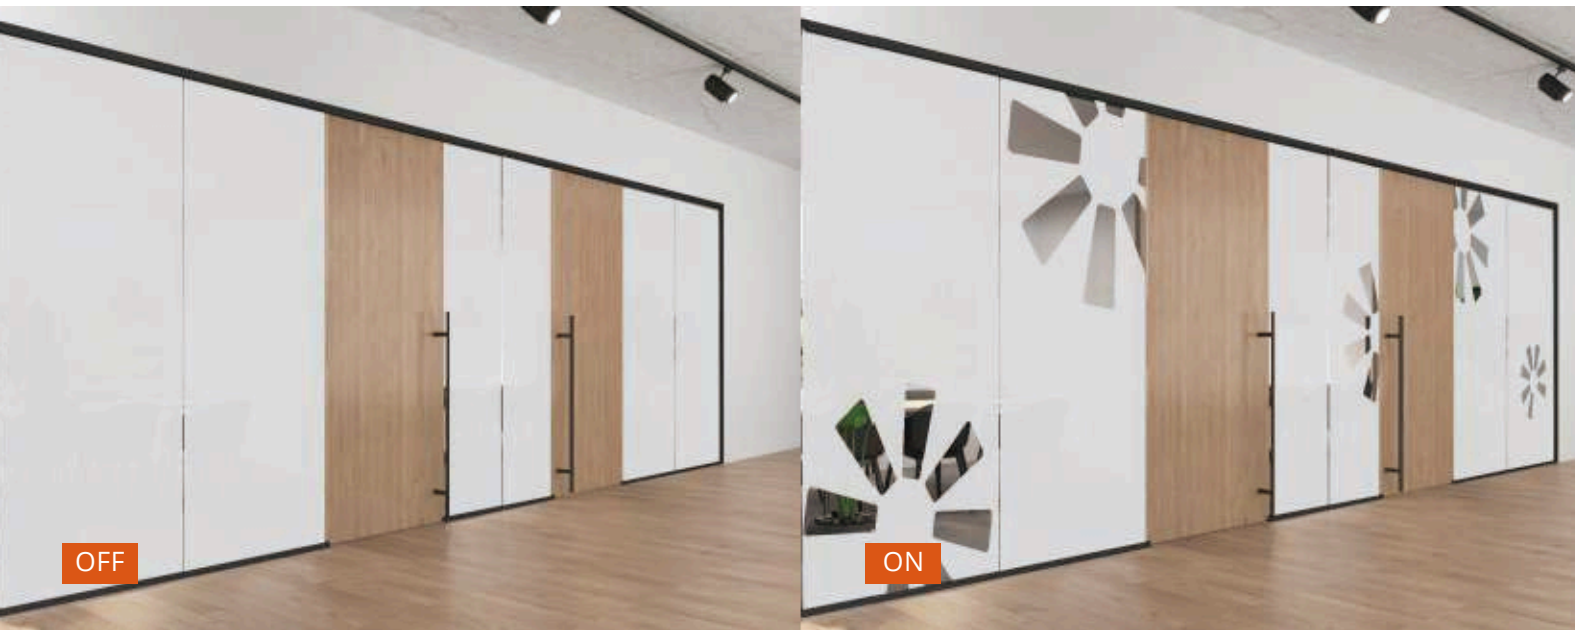

FILMBASE Limited edition

Limited edition is Filmbase luxury customized series, which allow etching content inside the smart film, such as company logo, slogan, products, art paintings, pictures etc., All contents can be switchable automatically. Can be sandwiched into the glass or Adhesive onto the etched glass to click to privacy.

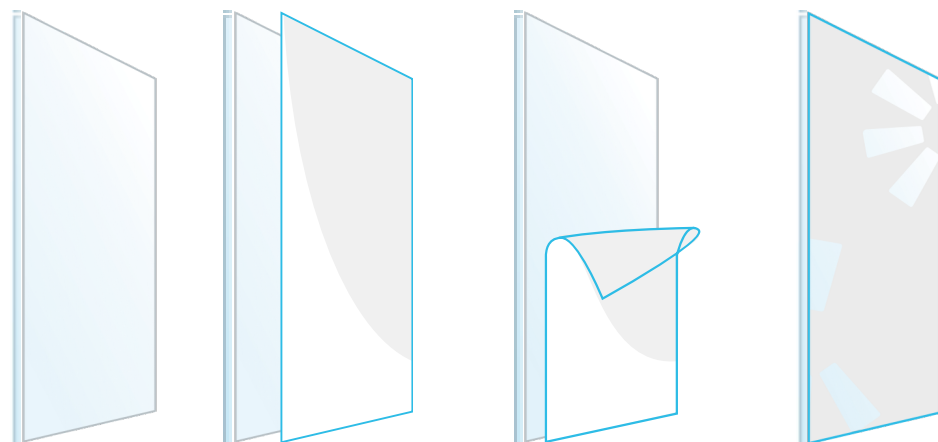

Size

FILMBASE Limited edition

Items			
Adhesive PDLC film	Total Thickness		0.47mm less than 1500
	Cut to Sheet	Width	less than 1500
		Length	less than 1500
Laminated PDLC film	Total Thickness		0.38mm less than 1500
	Cut to Sheet	Width	less than 1500
		Length	less than 1500

Optical Parameter

FILMBASE Limited edition

Items	ON/OFF		Test Methods/Standards
Operating voltage	ON	60V	Multimeter/ Voltage Regulator, WGW
Power consumption	ON	≤ 5W/m ²	Multi-parameter electric measuring instrument
Viewing angle	ON	≥ 160°	Visual Inspection
Uv blocking rate	OFF	≥ 99%	Optical transmittance tester
Infrared blocking rate	OFF	≥ 60%	
	OFF→ON	≤ 30 ms	Liquid crystal parameter integrated tester
Response time	ON	≤ 200 ms	
	ON→OFF	-30°C ~ 50°C	constant temperature and humidity testing machine
Operating temperature	F	100000 Hours	GB18910.5-2008
Life-span	--	≥ 2 million times	Self-made on/off tester
Switching times	--	--	--

Product Transparency / Haze


FILMBASE Limited edition

Items	ON/OFF	Full light tester		b value	Parallel light tester	
		Haze	Full light transmittance		45° light	Parallel light
Adhesive PDLC film	OFF	94.5	78.0	6.95	/	/
	ON	4.53	88.0	4.71	58.0	86.0
Laminated PDLC film	OFF	94.5	78.0	5.9	/	/
	ON	4.53	88.0	3.72	58.0	86.0



FILMBASE Colorful

Filmbase Colorful PDLC film is designed for the application where need different colors such as gray, black, red, green, blue or other colors. Warmly welcomed by art centers, kindergartens, supermarkets, theme restaurants, places that need diversified design.can be sandwiched into the glass or Adhesive onto the exited glass to click to privacy.

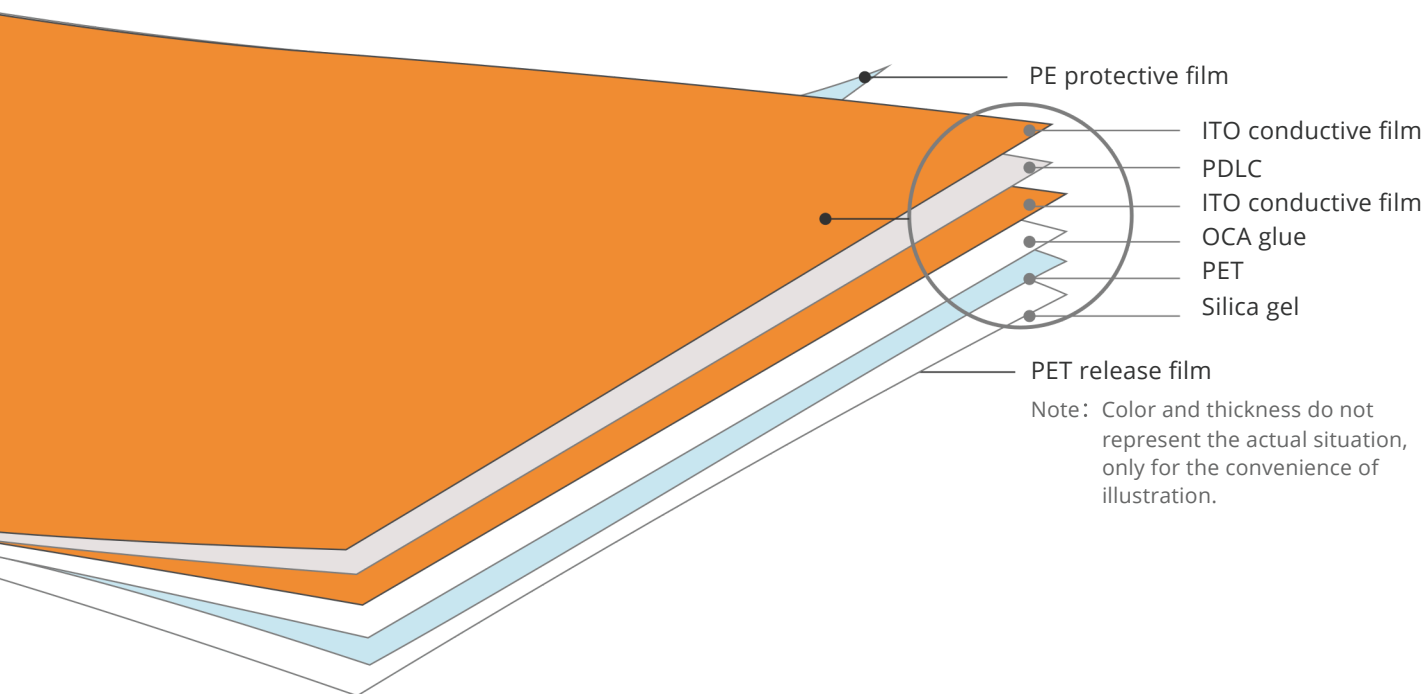

Size

FILMBASE Colorful

Items			
Gray adhesive PDLC film	Total Thickness		0.47mm
	Cut to Sheet	Width	100-1800(mm)
		Length	100-50000(mm)
	Roll	Width	1200,1500,1800(mm)
		Length	30meters /50meters
	Roll tube	Inner Diameter	6 inches
Gray laminated PDLC film	Total Thickness		0.38mm
	Cut to Sheet	Width	100-1800(mm)
		Length	100-50000(mm)
	Roll	Width	1200,1500,1800(mm)
		Length	30meters /50meters
	Roll tube	Inner Diameter	6 inches
Other colors adhesive PDLC film (black,blue,green,orange,red)	Total Thickness		0.54mm
	Cut to Sheet	Width	100-1500(mm)
		Length	100-50000(mm)
	Roll	Width	1500(mm)
		Length	30meters /50meters
	Roll tube	Inner Diameter	6 inches
Roll tube	Inner Diameter		

Optical Parameter



FILMBASE Colorful

Items	ON/OFF		Test Methods/Standards
Operating voltage	ON	60V	Multimeter/ Voltage Regulator,WGW
Power consumption	ON	≤ 5W/m ²	Multi-parameter electric measuring instrument
Viewing angle	ON	≥ 160°	Visual Inspection
Uv blocking rate	OFF	≥ 99%	Optical transmittance tester
Infrared blocking rate	OFF	≥ 60%	
Response time	OFF→O	≤ 30 ms	Liquid crystal parameter integrated tester
	N	≤ 200 ms	
Operating temperature	ON→OF	-30°C ~ 50°C	constant temperature and humidity testing machine
Life-span	F	100000 Hours	GB18910.5-2008
Switching times	--	≥2 million times	Self-made on/off tester
	--	--	



FILMBASE Auto Smart Film

Auto smartfilm is a smart film product developed by our company on the basis of the first generation of smart film, using special substrates and wide temperature liquid crystal materials, and specially developed for automotive use conditions.

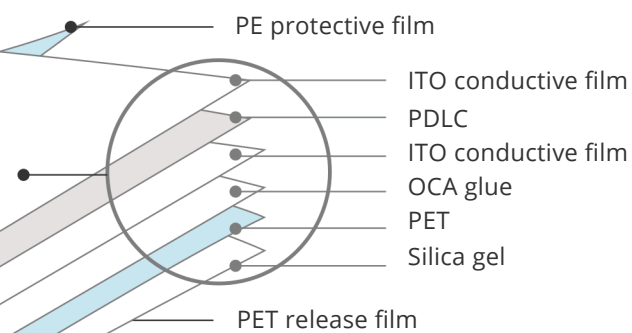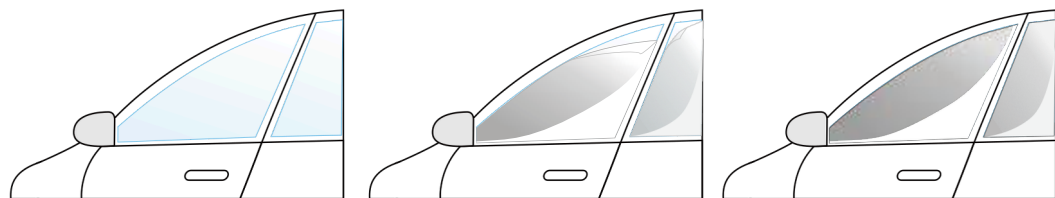

Note: Color and thickness do not represent the actual situation, only for the convenience of illustration.

Product Size

Auto smart film

Items		
Thickness	Total thickness (without protective film)	0.13mm
	PDLC	0.12mm
	Silica gel	0.01mm
	PE protective film	130µm
	PET release film	50µm
Sheet	Width	1200,1500 ¹ *mm
	Length	According to customer requirements
Roll	Width	1250,1500 ² *mm
	Length	≤ 50m/Roll
Roll tube	Inner Diameter	6 inches

Note*: This width is the actual size, the width of the calculated area is 1200,1500, mm

Photoelectric Performance

Auto smart film

Items	ON/OFF		Test Methods/Standards
Operating voltage	ON	60V	Multimeter/ Voltage Regulator,WGW
Power consumption	ON	≤ 5W/m ²	Multi-parameter electric measuring instrument
Viewing angle	ON	≥ 160°	Visual Inspection
Uv blocking rate	OFF	≥ 99%	Optical transmittance tester
Infrared blocking rate	OFF	≥ 82%	
Response time	OFF→ON	≤ 30ms	Liquid crystal parameter integrated tester
	ON→OFF	≤ 200ms	
Operating temperature	--	-30°C ~ 95°C	constant temperature and humidity testing machine
Lifetime	--	10 -15 years	GB18910.5-2008
Switching times	--	≥ 100 ten thousand Times	Self-made on/off tester

Auto smart film is driven by AC power, gray and transparent when power is added, and fogged and translucent when power is removed, and its photoelectric performance is shown in the table above.

Product Transparency / Haze

Auto smart film

Items	ON/OFF	Full light tester			Parallel light tester	
		Haze	Full light transmittance	b value	45° light	Parallel light
Adhesive PDLC film	OFF	94.2	51.19	5.24	/	/
	ON	2.94	56.43	3.2	38.4	55.26